


PIN ASSIGNMENTS

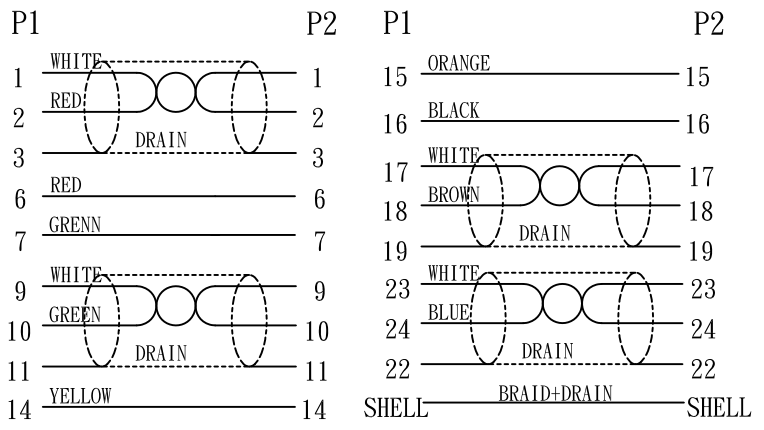



NOTES:

1. 100% OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.


TOLERANCES			REVISIONS				COMPONENT NO :		Arvanics Corporation.		
X .	+	mm	REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-S10	APPROVED :			
X . X	+	mm						CHECKED :	TITLE : CABLE ASS' Y		
X . XX	+	mm							REQUIRED DOCUMENTS : *		
X . XXX	+	mm							SCALE : /	SHELLT : 1/2	REV : 0
METRIC (mm)	-	mm						DRAWN :	DRAWING :		THIRD ANGLE PROJECTION
	-	mm						DATE :	FILE :		

NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24 # *5C+AEB85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES		REVISIONS			COMPONENT NO :	Arvanics Corporation.		
		REV	DESCRIPTION	DATE	APPVD.			
X .	+ mm					APPROVED :	TITLE : CABLE ASS'Y	
	- mm						REQUIRED DOCUMENTS : *	
X . X	+ mm					CHECKED :	SCALE : /	SHELLT:2/2
	- mm							REV:0
X . XX	+ mm					DRAWN :	DRAWING :	
	- mm					DATE :	FILE :	THIRD ANGLE PROJECTION 
X . XXX	+ mm							
	- mm							
METRIC (mm)								

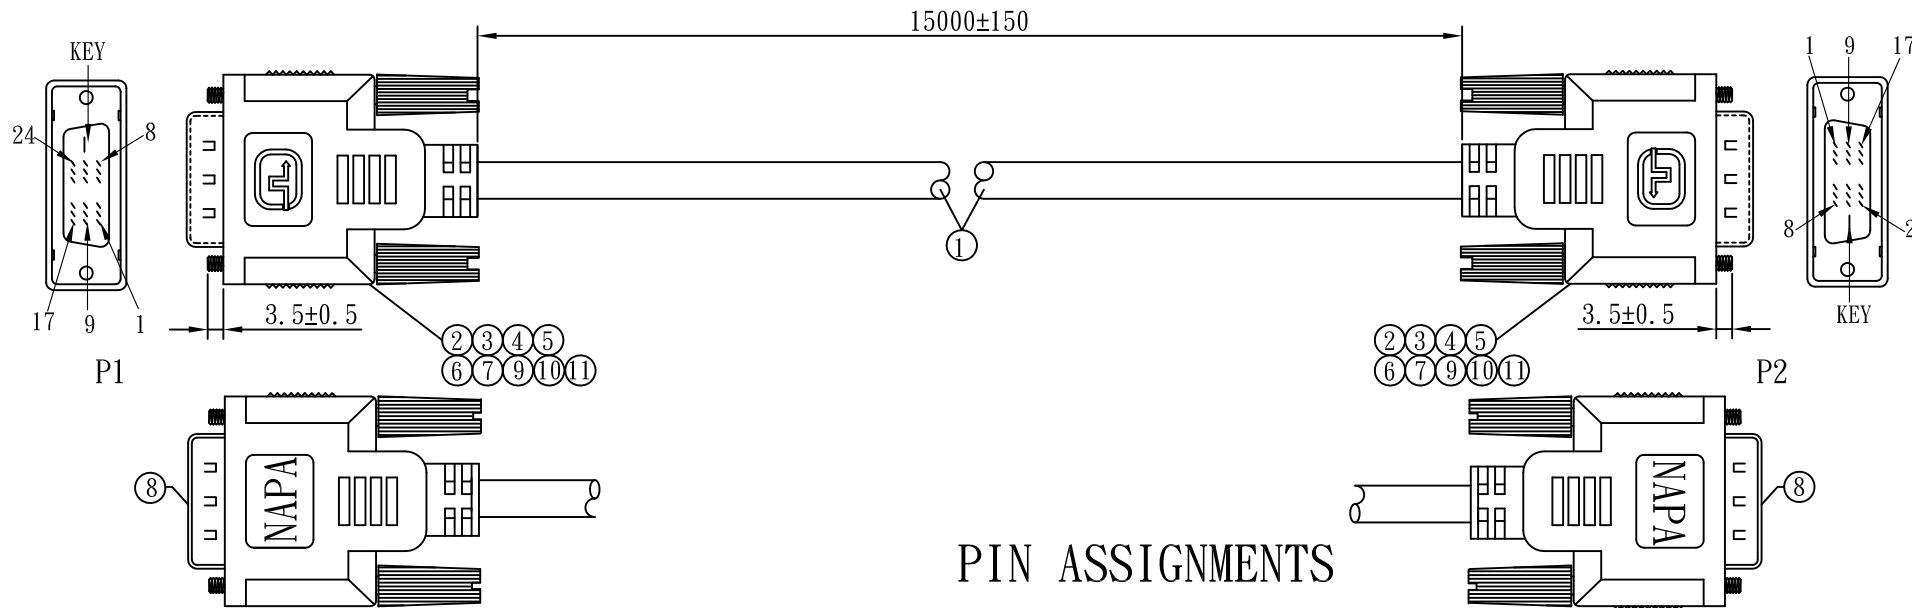

PIN ASSIGNMENTS

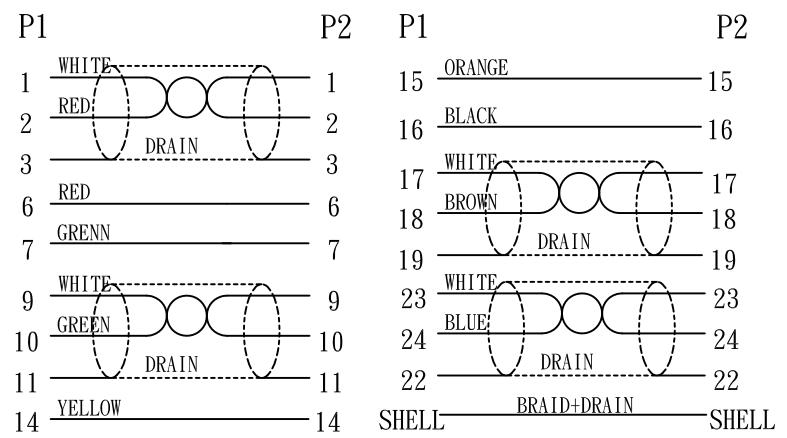



NOTES:

1. 100% OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S15		Arvanics Corporation.		
REV	DESCRIPTION	DATE	APPVD.	APPROVED :	TITLE : CABLE ASS'Y						
X .	+	mm				REQUIRED DOCUMENTS : *					
X . X	-	mm				SCALE : /	SHELLT : 1/2	REV : 0			
X . XX	±	mm				DRAWING :					
X . XXX	-	mm				DATE :	FILE :	THIRD ANGLE PROJECTION			
METRIC (mm)											

NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24 # *5C+AEB85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES			REVISIONS				COMPONENT NO :		Arvanics Corporation.		
X .	+	mm	REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-S15	APPROVED :			
X . X	+	mm						TITLE : CABLE ASS' Y			
X . XX	+	mm						REQUIRED DOCUMENTS : *			
X . XXX	+	mm						SCALE : /	SHELLT:2/2	REV:0	
METRIC (mm)	-	mm						DRAWN :	DRAWING :		
	-	mm						DATE :	FILE :	THIRD ANGLE PROJECTION 	

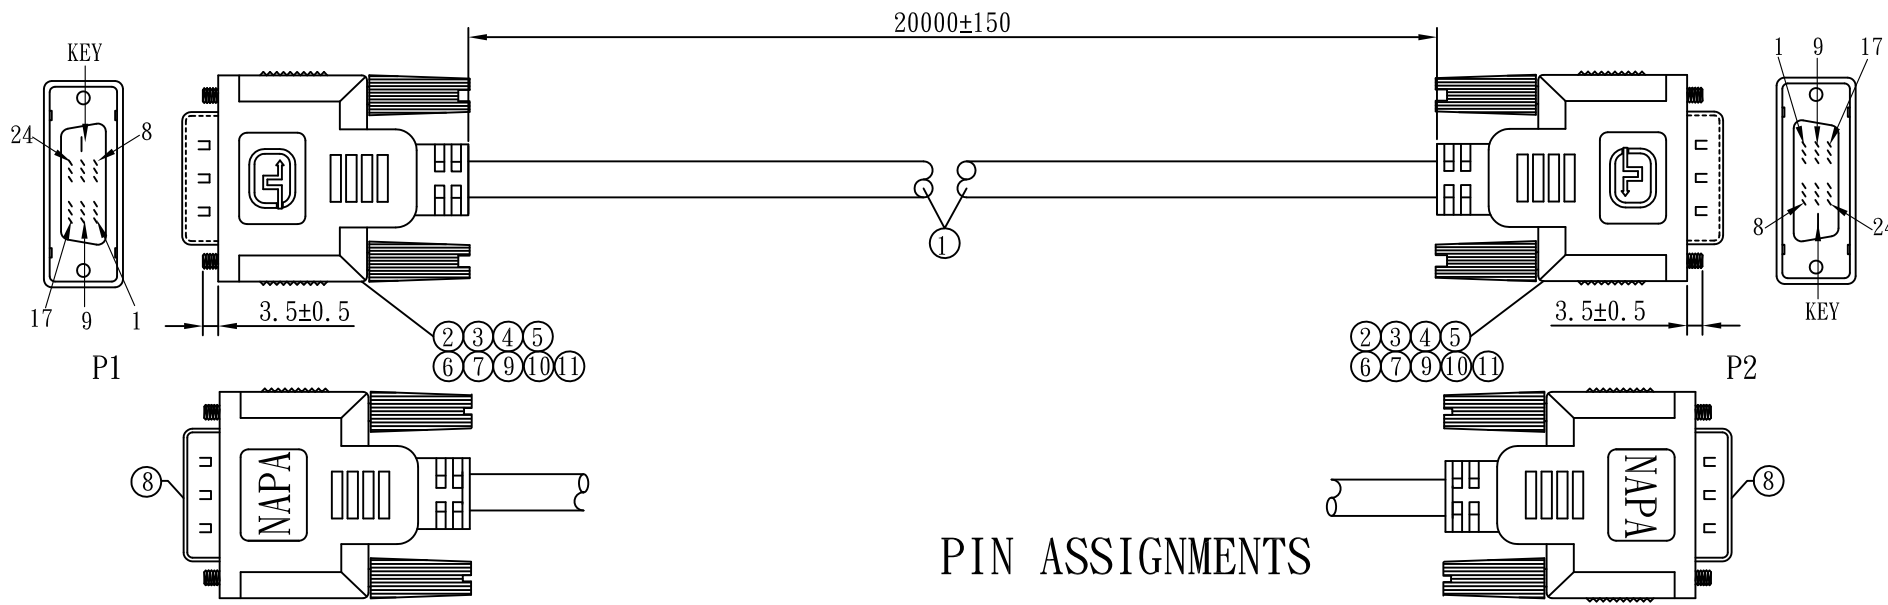


PIN ASSIGNMENTS

P1	P2	P1	P2
1 WHITE	1	15 ORANGE	15
2 RED	2	16 BLACK	16
3 DRAIN	3	17 WHITE	17
6 RED	6	18 BROWN	18
7 GREEN	7	19 DRAIN	19
9 WHITE	9	23 WHITE	23
10 GREEN	10	24 BLUE	24
11 DRAIN	11	22 DRAIN	22
14 YELLOW	14	SHELL BRAID+DRAIN	SHELL


NOTES:

- 100% OPEN, SHORT & MISWIRE TEST.
- PAY ATTENTION TO PIN ASSIGNMENTS.


TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S20		Arvanics Corporation.		
REV	DESCRIPTION	DATE	APPVD.	APPROVED :	CHECKED :	TITLE : CABLE ASS' Y					
X . +	mm					REQUIRED DOCUMENTS : *					
X . X +	mm					SCALE : / SHELLT : 1/2 REV : 0					
X . XX ±	mm					DRAWING :					
X . XXX +	mm					DATE :					
METRIC (mm)						FILE :					




NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24 # *5C+AEB85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES			REVISIONS				COMPONENT NO :		Arvanics Corporation.		
			REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-S20	TITLE : CABLE ASS'Y			
X .	+	mm					APPROVED :	REQUIRED DOCUMENTS : *			
	-	mm					CHECKED :	SCALE : /	SHELLT:2/2	REV:0	
X .X	+	mm						DRAWN :	DRAWING :		<small>THIRD ANGLE PROJECTION</small> 
	-	mm					DATE :	FILE :			
X .XX	+	mm									
	-	mm									
X .XXX	+	mm									
	-	mm									
METRIC (mm)											

GM-EW-01

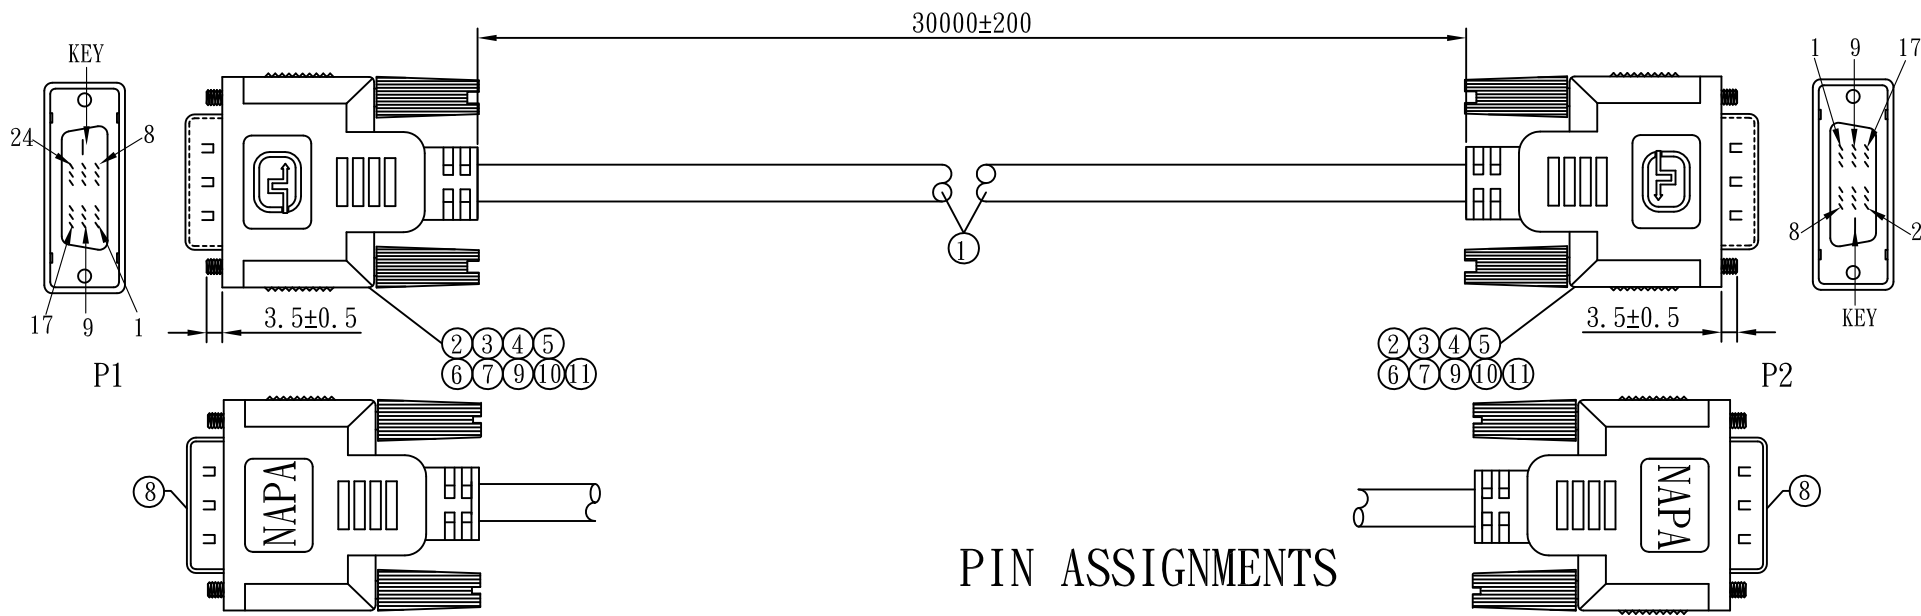

PIN ASSIGNMENTS

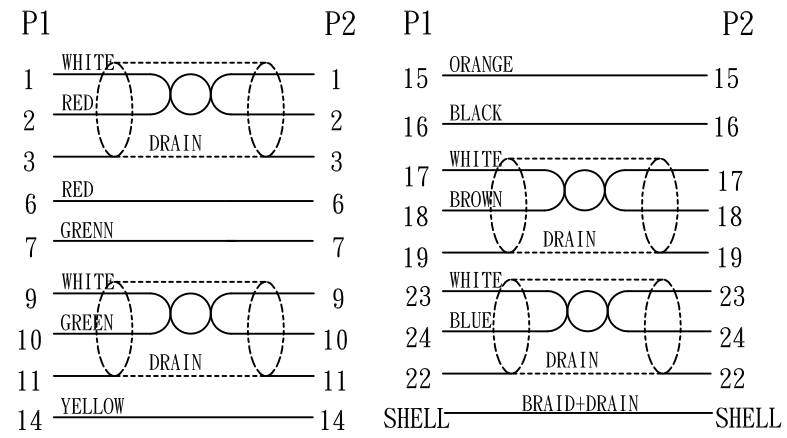


NOTES:


1. 100% OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

TOLERANCES			REVISIONS				COMPONENT NO : DVIP/DVIP-S30		Arvanics Corporation.		
REV	DESCRIPTION	DATE	APPVD.	APPROVED :	CHECKED :	TITLE : CABLE ASS' Y					
X .	+	mm				REQUIRED DOCUMENTS : *					
X . X	+	mm				SCALE : /	SHELLT : 1/2	REV: 0			
X . XX	+	mm				DRAWN :	DRAWING :				
X . XXX	+	mm				DATE :	FILE :				
METRIC (mm)									THIRD ANGLE PROJECTION		

NO	DESCRIPTION	MATERIAL
1	CABLE	UL20276 (24#*1P+EAM)*4+24 #*5C+AEB85% OD:9.5mm CLR-243 BEIGE
2	CONN	DVI(18+1) MALE PBT BLACK PIN G/F
3	CASE SHIELD	DVI SHIELD ID:11.0mm PLATED NICKEL
4	SHELL	DVI(18+1) MALE SHELL TIN PLATED
5	PVC	SHORE A 95±2 COLOR:BEIGE
6	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ1.0mm BLACK
7	TUBE	UL/CSA 125°C VW-1 (F4) 300V Φ3.0mm BLACK
8	DUST COVER	CLEAR
9	OUTERMOLDED	DVI ID:10.0mm SHORE 95+5/-2 CLR-023
10	SCREW	DVI SCREW 2.8*31.5mm#4-40 MOLDED ABS COLOR:BEIGE
11	COPPER-FOIL	W8*T0.04mm

TOLERANCES			REVISIONS				COMPONENT NO :		Arvanics Corporation.		
			REV	DESCRIPTION	DATE	APPVD.	DVIP/DVIP-S30	TITLE : CABLE ASS'Y			
X .	+	mm					APPROVED :	REQUIRED DOCUMENTS : *			
	-	mm					CHECKED :	SCALE : /	SHELLT:2/2	REV:0	
X .X	+	mm						DRAWN :	DRAWING :		THIRD ANGLE PROJECTION 
	-	mm					DATE :	FILE :			
X .XX	+	mm									
	-	mm									
X .XXX	+	mm									
	-	mm									
METRIC (mm)											

Model: DVIP/DVIP-Sxx

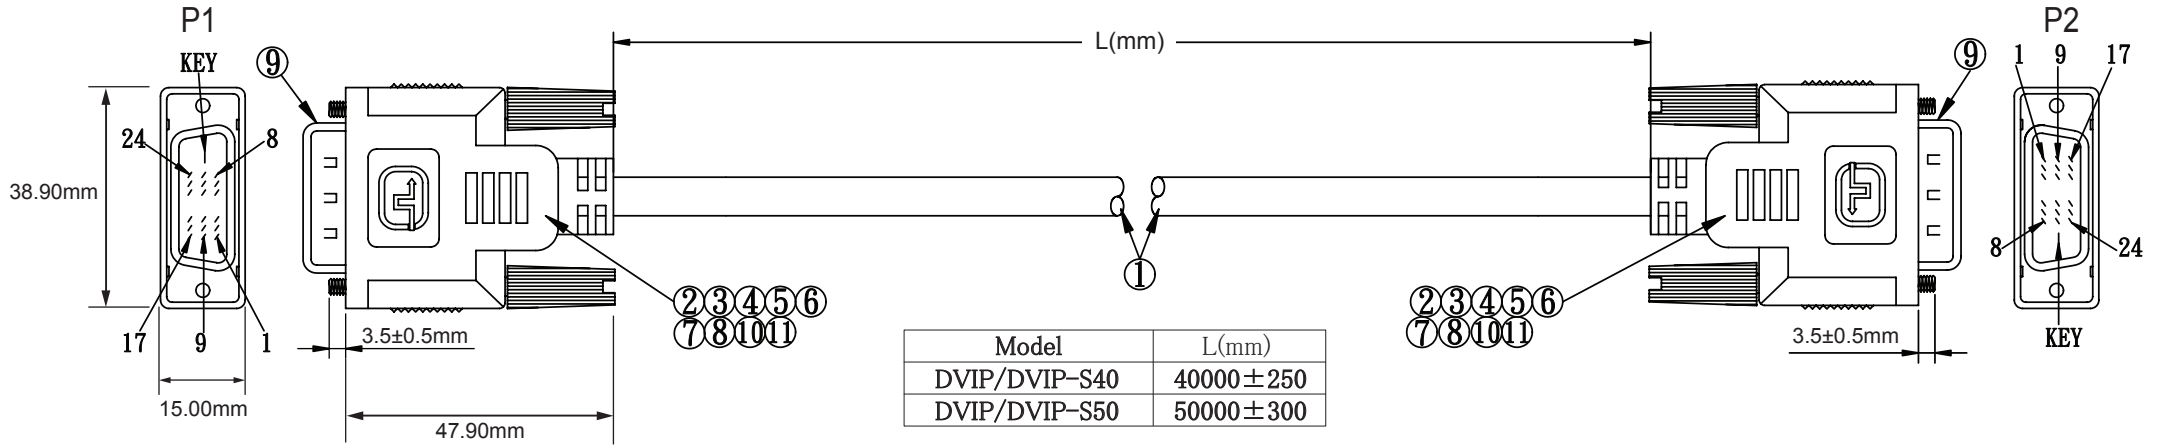


NOTES :

1. 100% OPEN, SHORT & MISWIRE TEST.
2. PAY ATTENTION TO PIN ASSIGNMENTS.

NO	DESCRIPTION	MATERIAL	QTY
1	CABLE	UL 20276(24#*1P+EAM)*4+24#*5C+AEB85% OD:9.5mm CLR-243 BEIGE	1
2	CONNECTOR	DVI(18+1) MALE PBT BLACK PIN G/F	2
3	CASE SHIELD	DVI SHIELD ID=10.5mm PLATED NICKEL	2
4	CASE SHIELD	DVI SHIELD ID:10.5mm NO PLATED	2
5	SHELL	DVI(18+1) MALE SHELL GOLD PLATED	2
6	PVC	SHORE A 95±2 COLOR:BEIGE	2
7	TUBE	UL/CSA 125°C VW-1(F4) 300V ϕ 1.0mm BLACK	2
8	TUBE	UL/CSA 125°C VW-1(F4) 300V ϕ 2.5mm BLACK	2
9	DUST COVER	CLEAR	2
10	OUTERMOLDED	DVI ID:10mm SHORE95± CLR-023	2
11	SCREW	DVI SCREW 2.8*31.5mm #4-40 MOLDED ABS COLOR:BEIGE	2

PIN ASSIGNMENTS

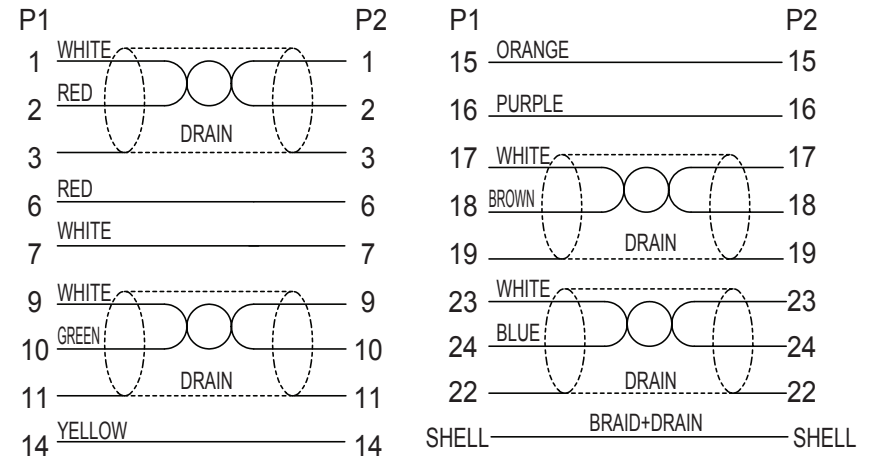

COMPONENT NO :
DVI-DVI 40M

Arvanics Corporation

APPROVED :

Model : DVIP/DVIP-S40, S50

TITLE : CABLE ASS'Y

CHECKED :

REQUIRED DOCUMENTS : *

SCALE : /

SHEET : 1/2

REV : 0

DRAWN :

DRAWING :

DATE :

FILE :

