


ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT




CUSTOMER P/N	L±(mm)
HDSS-005	500±50
HDSS-01	1000±50
HDSS-02	2000±50
HDSS-03	3000±100
HDSS-05	5000±150

LEVEL-0.5
LEVEL-1.5

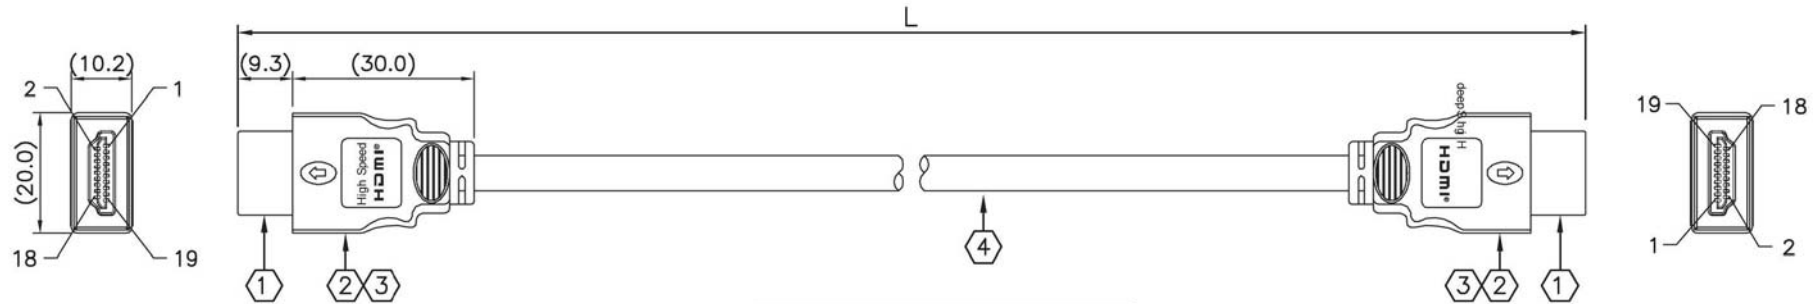

PINOUT CONFIGURATION

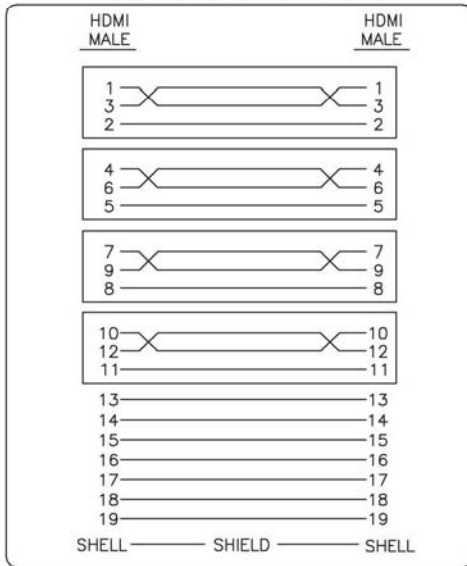

NOTE:

1. THIS ITEM CONTAINS PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING DESIGN.



2. WIRE MARKING:

NAPA ULTRA FLEX HI-PQ CABLE Arvanics Corp.

3. **NO TTL LOGO**

UNIT: mm

ITEM	DESCRIPTION	QTY.	UNIT
1	HDMI TYPE A 19PIN CONNECTOR,MALE W/GOLD PLATED PINS UL94V-0	2	PCS.
2	PAT. US 6,287,148 B1 RF-BLOK™ SHIELDING METAL CAN	2	PCS.
3	BLACK MOLDED PVC HOOD	2	PCS.
4	(100Ω SHIELDED TWISTED PAIRS)x4C+(CONTROL WIRE)x7C+AL-FOIL+DRAIN+SPIRAL OVERALL; PANTONE 7546C COLOR PVC JACKET,	SEE	DWG.

REVISED DETAILS


REV.	DESCRIPTION	DATE

REVISED BY	Part number:	Revision:
	RFQ number:	Drawing#:
	Drawn by:	Scale:
	Checked by:	Date:

© Copyright 05-2012
Arvanics Corporation

PAGE: SALES:

ALL MATERIAL ARE RoHS AND CALIFORNIA PROP.65 COMPLIANT

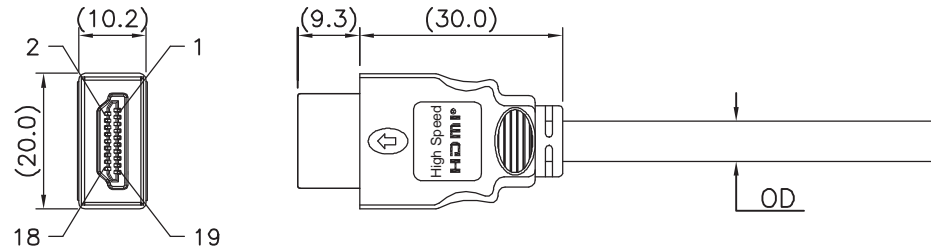

CUSTOMER P/N	OD	
HDSS-005	7.0mm	LEVEL-0.5
HDSS-01		
HDSS-02	8.0mm	LEVEL-1.5
HDSS-03		
HDSS-05		

REVISED DETAILS			REVISED BY	Part number:	Revision:	© Copyright 05-2017 Arvanics Corporation
REV.	DESCRIPTION	DATE		RFQ number:	Drawing#:	
				Drawn by:	Scale:	
				Checked by:	Date:	