


# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

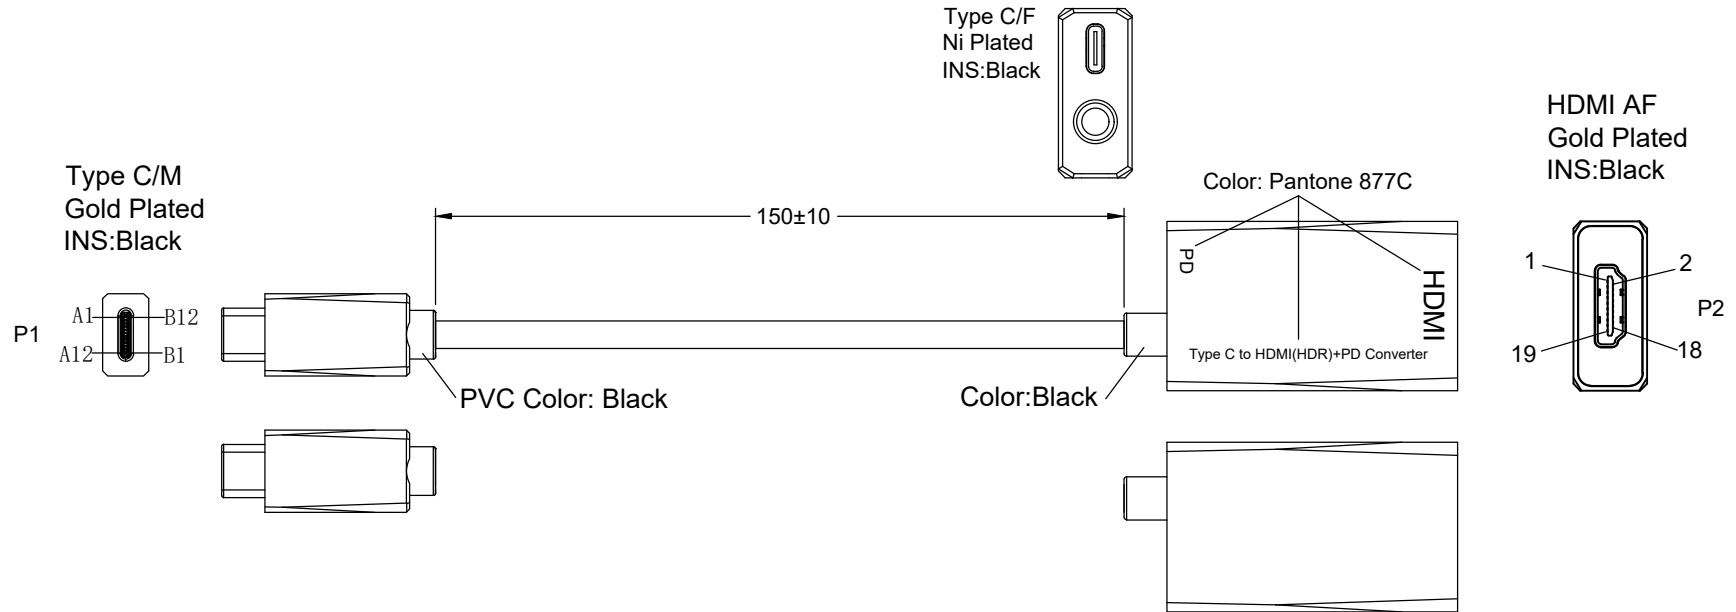

## Features: (TYC-HD60-PD)




1. USB Type C (Male) Reversible Plug to HDMI (Female) Converter.
2. Supports Displayport Alternate mode on USB Type C standard.
3. Compliant with HDMI specification version 2.0.
4. Resolution up to 3840x2160/60Hz.
5. Supports HDCP 2.2.
6. Supports metadata transport for static High Dynamic Range (HDR).
7. Supports USB Power Delivery specification 2.0 (PD).
8. Supports Plug & Play.

PACKING: EACH / POLYBAG

Tolerance Inch mm			Arvanics Corporation					
.X	.015	.30	Title Type C to HDMI 2.0 + PD Converter					
.XX	.010	.10						
.XXX	.005	.05						
Draw Andy 09/02/19'			Customer P/N: UTC-UHDF0015-PD					
Check			App'd					
Engr			Scale	NONE	Units	m/m	Third Angle Projection	
Dwg No.			S-20-0123		REF: I	Sheet 1/2		

# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

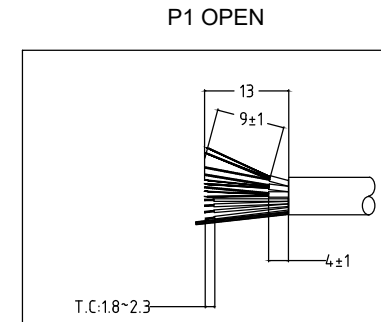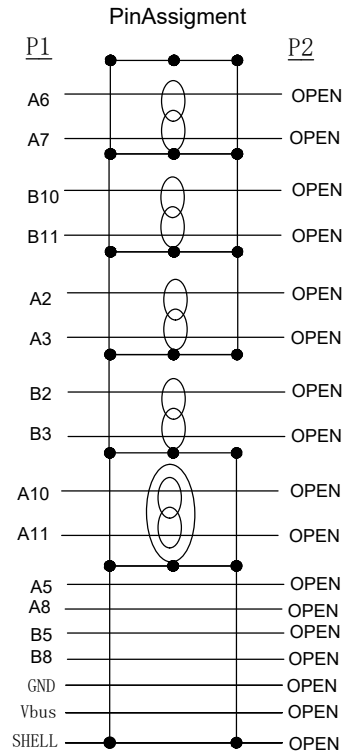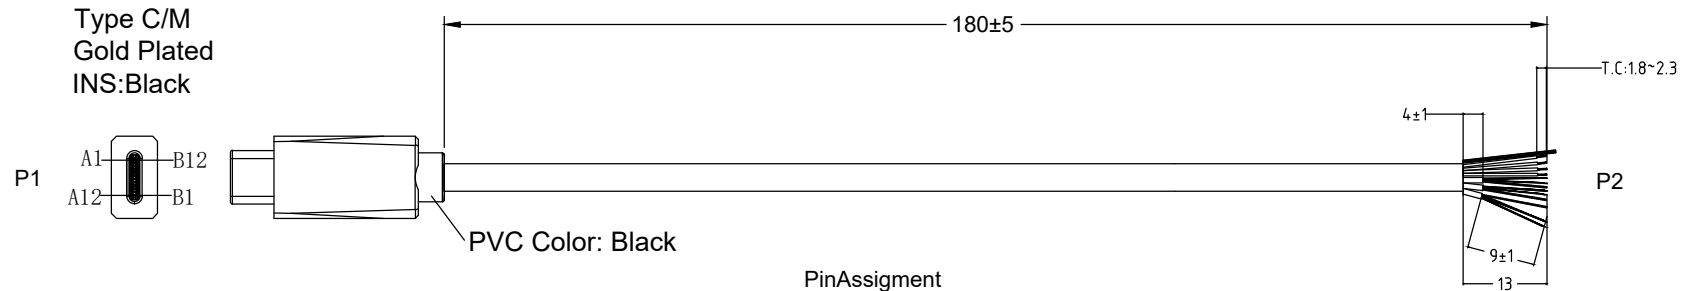

**NOTE:**

**1. CABLE:**

UL2725 [#32(7/0.08T.C)\*1P+D+AL+HM]\*4  
 + #32(7/0.08T.C)\*1P+ #32(7/0.08T.C)\*5C  
 + #24(7/0.2T.C)\*2C+AL+D+B(16/9/0.08T.C).  
 PVC JACKED OD: 5.0mm, Color: Black.

**2. CONNECTOR: P1: Type C Male**

CONTACT: G/F SHELL: Gold-Plated.

**3. HOOD: MOLDED TYPE, PVC 45P, COLOR:Black**

**4. TEST REQUEST:**

1. 100% OPEN SHORT & MIS-WIRE TEST.
2. CONTACT RESISTANCE 3 ohm MAX.
3. INSULATION RESISTANCE 10M ohm MIN.

Tolerance Inch mm			Arvanics Corporation				
.X	.015	.30					Title Type C to HDMI 2.0 + PD Converter
.XX	.010	.10					
.XXX	.005	.05					
Draw Andy 09/02/19'			Customer P/N: UTC-UHDF0015-PD				
Check			App'd				
Engr			Scale	NONE	Units	m/m	Third Angle Projection
Dwg No. S-20-0123			REF: I		Sheet 2/2		